



IPN 627 (Avaya A) Connection Guide

Compatible Desk Phones:

AVAYA

Avaya 1408/1416
 Avaya 1608/1616
 Avaya 2410
 Avaya 5410
 Avaya 6416D+M
 Avaya 6424D+M
 Avaya 9404/9408
 Avaya 9504 /9508
 Avaya 9608/9610
 Avaya 9611G
 Avaya 9620/20C/20L
 Avaya 9621G
 Avaya 9630/30G
 Avaya 9640/40C/40G/41G

Avaya 9650/50C
 Avaya 9670



SHORETEL

Shoretel IP 212K
 Shoretel IP 265
 Shoretel IP 565/565G
 Shoretel IP 230/230G
 Shoretel IP 560/560G


W9xx Base Layout:

A. Universal base station

- | | |
|----------------------------|-------------------------------------|
| 1. Battery Indicator | 7. EHS port |
| 2. PC button | 8. Telephone connector ('Tel' port) |
| 3. Telephone (TEL) button | 9. Handset connector |
| 4. Online indicator | 10. EHS Selection switch |
| 5. USB connector (PC port) | 11. Microphone volume up/down |
| 6. Power socket | 12. Wiring switch |

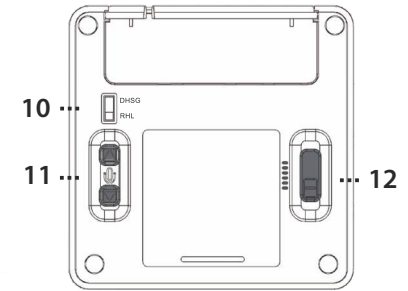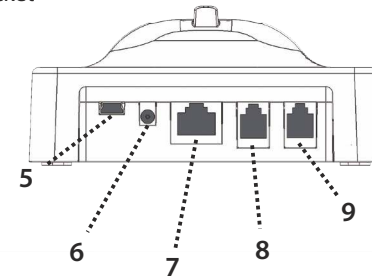

Step 1. Switch EHS Selection Switch to RHL Setting

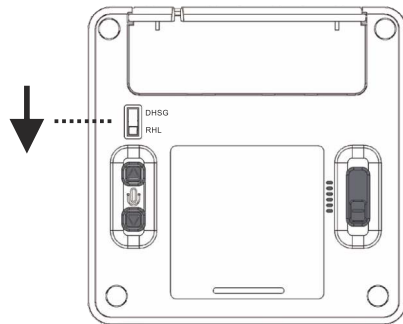

Step 2. Connect your Avaya A EHS cable to the EHS and TEL sockets on the Headset base

Step 3. Connect the other end of the Avaya A EHS cable into the Headset port on the telephone

Step 4. Remove the white tape off the Ringer Sensor microphone, then fix the microphone to the Ringer sound outlet on your deskphone

Step 5. Plug the Ringer Sensor cable into the MIC jack on the EHS Cable box

